


N-type monocrystalline high-efficiency
bifacial double glass module

Maximum module efficiency

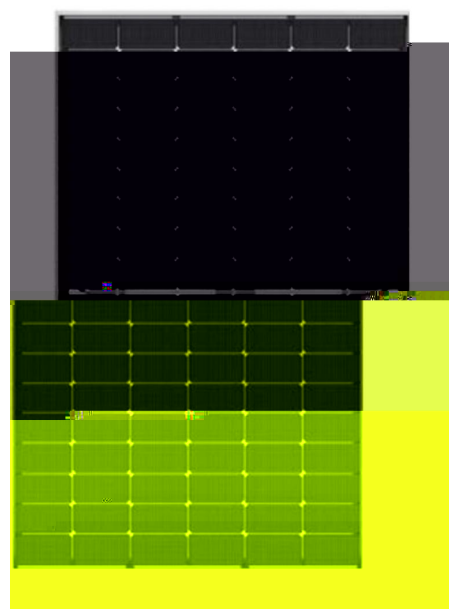


up to 22.5%.

12

- 12-year product warranty
- 1% 1st-year power degradation

30

- 30-year linear power warranty
- 0.4% annual power degradation

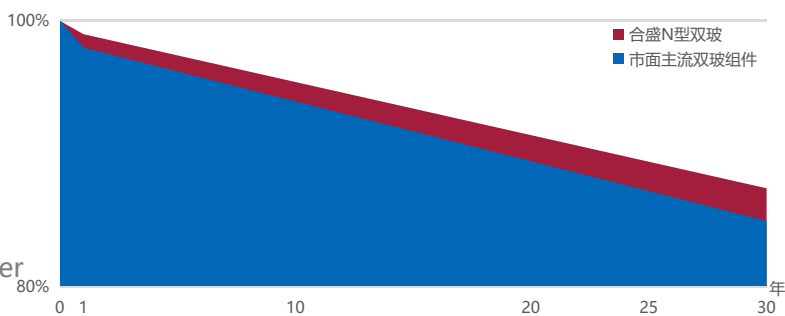

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System (QMS)

ISO14001:2015: Environmental Management System

ISO45001:2018:Occupational Health and Safety Management System



Mechanical Parameters

Cell type N-type Monocrystalline solar cells

Number of half cell 108 (6×18)

Dimensions 1722×1134×30mm

Weight 20.5kg

Front Glass 1.6mm anti-reflective coating glass

Back Glass 1.6mm Heat-strengthened glass

Anodized aluminum alloy